



Chuck-It Bucket Instructions

What you will need:

Chuck-It Bucket
2 Hooks (included with purchase)

Loader Bucket
Drill or welder

To use:


1. Drill or weld hooks on the back of the loader bucket. The hooks should be vertical with the opening on top. Hooks will need to be placed equal distance, 2-3 feet on either side from the center of the loader bucket.



2. Drive up to the Chuck-It Bucket, lowering and leveling the loader bucket so that the cutting edge will slide into the open slot of the Chuck-It Bucket. Drive until the cutting edge stops below. Raise the loader bucket slightly so that the Chuck-It Bucket is resting on the loader bucket.



3. Fasten the chains to the hooks on the back of the loader bucket.

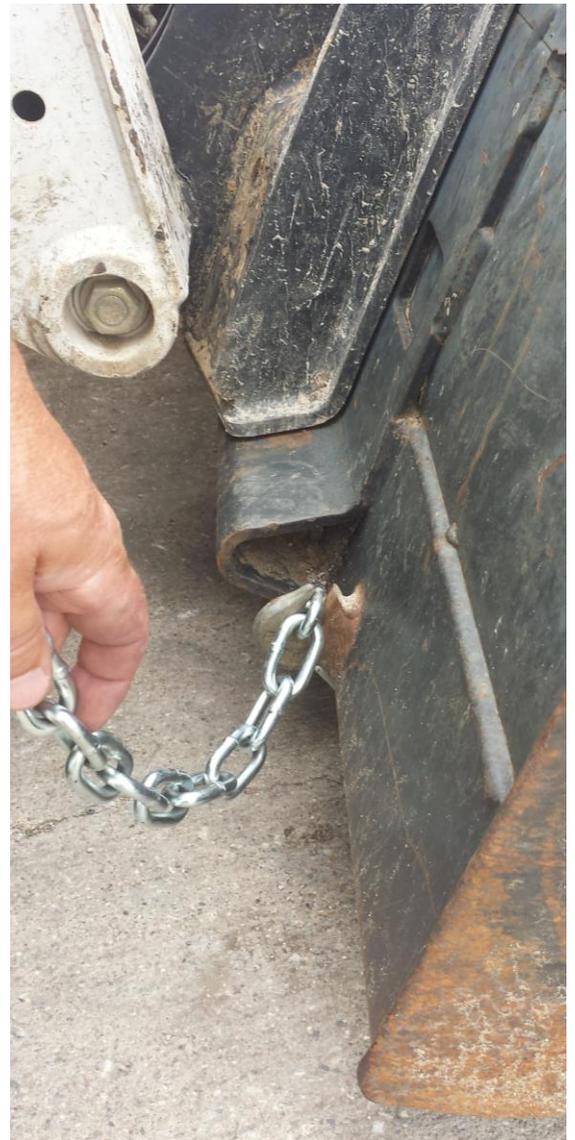

4. Lift the loader bucket to desired height keeping it low and level as you drive slowly to destination. **The combined weight of the Chuck-It Bucket and its contents could be as much as 1500 lbs. Be sure to check the Operator's Manual of your skid loader or tractor loader to make sure you are not exceeding the safe operating weight limitations.**



5. Once at destination, unlatch both rubber straps on the lid for dumping. If outside temperature is below freezing point, using a large propane torch, warm the stainless steel portion of the Chuck-It Bucket, making sure all surface is covered, but not getting too close to the plastic lid.



6. Once at destination, lift loader bucket over the compost site or dumpster, keeping in mind that as the Chuck-It Bucket unloads, it will be dumping 2-3 feet beyond your loader bucket. Also note for biosecurity purposes, one of the benefits of the Chuck-It Bucket is that the end site and the bucket do not have to touch. **As this is being dumped, make sure everyone is standing clear as the Chuck-It Bucket tips forward when its weight goes over center. BEFORE YOU PROCEED TO DUMP, MAKE SURE BOTH CHAINS ARE STILL IN THEIR HOOKS. Dump the Chuck-It Bucket.**



7. Once the Chuck-It Bucket is completely emptied, tip the loader bucket back into a level position and lower. The Chuck-It Bucket will return to its resting position on its own.



8. Drive back to the Chuck-It Bucket's original location. Un-hook the chains from the back of the loader bucket. Lower the bucket onto the ground and back away. Hook the rubber straps back on the lid to keep it from blowing open.



9. For more information and a video of the Chuck-It Bucket in use, visit: www.pigeasy.com/pigeasy-products/chuck-it-bucket/

