

Instructions


What you need:

Awl	Template	Two Drinking Nipples
Drill	Clamp	1/2 inch female x hose barb fixture
Drill bit sized 1/16 larger than hardware	Ratchet / Wrenches	
Mounting Hardware (U-Bolt, Bolt or Hose Clamp)	Table Saw / Reciprocating Saw (If needed)	
	Piping Compound	

To Install:


1. Determine mounting hardware. There are many ways to mount the SnoutSpout. Pictured throughout instructions is mounting a SnoutSpout to an angle ironed top crate.
2. Place SnoutSpout in desired location on stall panel, typically as far forward as possible.
3. With an awl, mark lines for bar locations and area where you intend to install the mounting hardware. If there is an obstruction, mark the areas you need to cut in order to place in the most desired location. Typically, the SnoutSpout will take two mounting points; near the top horizontal bar and another near the bottom. By mounting in two places, it secures the SnoutSpout from any possible movement in either direction.



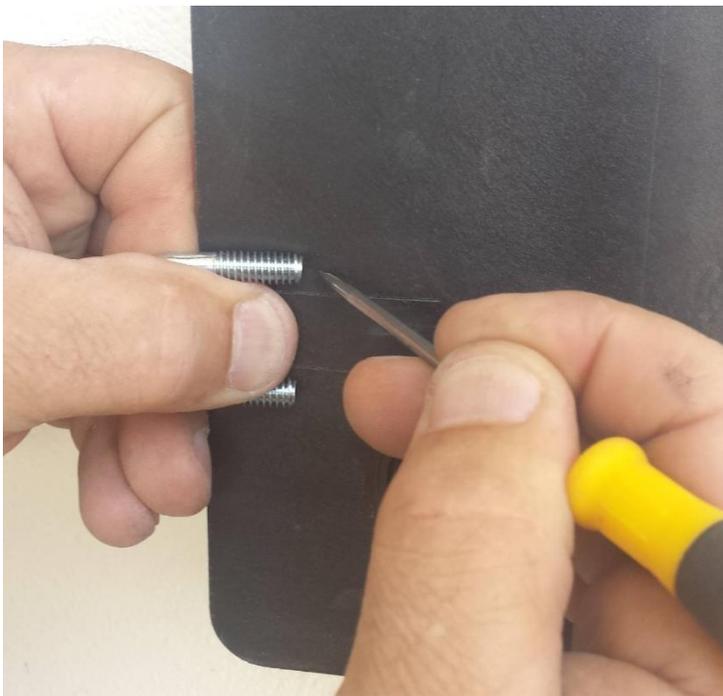

4. With the awl, mark area where you intend to drill holes for U-Bolt, centering the U-Bolt where the bar crosses the SnoutSpout mounting plate.

5. Select drill bit approximately 1/16 inch larger than the diameter of the U-Bolt. Drill holes where previously marked by awl.

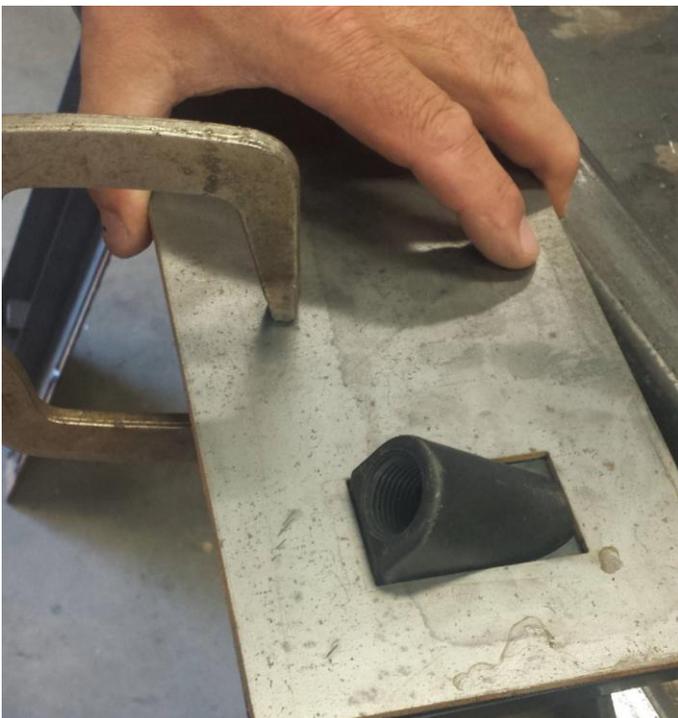

6. Place template on SnoutSpout and clamp securely. The template fits on the flat side of the SnoutSpout.

7. Using the drilled SnoutSpout as a guide, drill through the template for placement of holes on additional SnoutSpouts to be installed. If g stall has round rod on top of crate, drill large hole for hose clamp or choose U-Bolt on upper vertical rod.



8. Find desired location for top bolt and drill through top bar or angle iron. Place SnoutSpout in desired location and drill through top of SnoutSpout. Secure SnoutSpout with bolt.





8 (cont'd). On round rods, use hose clamp to secure SnoutSpout on top rod or secure via U-Bolt on upper vertical rod near top horizontal rod.

9. Secure bottom by fastening U-Bolt.





10. To install drinking nipples and hose barb fixture, smear small amount of Pipe Thread Sealant in the first few threads on each opening of the SnoutSpout.

11. Turn in watering nipple with pliers or wrench until there is 0-1 thread showing.

